

12-06-99

PATENT
Attorney Docket No. 40725.830063.000
Express Mail Label No. EL415706719US

IN THE U.S. PATENT AND TRADEMARK OFFICE

Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

This is a request for filing a _____ Non-Provisional Original X Utility _____ Design Patent Application, _____ Continuation _____ Divisional _____ Continuation-in-Part Application under 37 CFR 1.53(b), of pending prior application Serial No. _____ filed on _____ by _____ for _____ which is a _____ Application of prior application Serial No. _____ by JORMA ANTERO SEPPANEN for SIGNAL QUALITY INDICATOR APPARATUS AND METHOD PARTICULARLY USEFUL FOR MOBILE TELEPHONES from which priority is claimed.

Enclosed are:

- X An original specification, claims, drawings and Declaration and Power of Attorney.
- _____ A true copy of the prior application, including the specification, claims, drawings, oath or declaration, and any amendments referred to in the oath or declaration as originally filed. Any such amendments referred to in the oath or declaration filed to complete the prior application did not introduce new matter therein.
- _____ A preliminary amendment is enclosed to be entered in the new application after a filing date has been granted.
- _____ New formal drawings are enclosed.
- _____ A List of References.

The filing fee is calculated below:

The filing fee is
calculated below:

(Col. 1)

(Col. 2)

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	16 - 20 =	* 0
INDEP CLAIMS	3 - 3 =	* 0
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

SMALL ENTITY

RATE	FEE
	\$380
x 9 =	\$
x39 =	\$
x130 =	\$
TOTAL	\$

OR

OR

OR

OR

OR

OR

OTHER THAN A
SMALL ENTITY

RATE	FEE
	\$ 760
x18 =	\$ 0
x78 =	\$ 0
+260 =	\$ 0
TOTAL	\$ 760

X A check in the amount of \$ 760.00 is enclosed.

_____ Please charge Deposit Account No. 082623 in the amount of \$ _____.

_____ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Account No. 082623.

X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 082623. A duplicate copy of this sheet is attached.

X Any filing fees under 37 CFR 1.16 for the presentation of extra claims.

_____ Any patent application processing fees under 37 CFR 1.17.

_____ Cancel claims _____.

Priority under 35 U.S.C. 119 is claimed on the basis of prior _____ application Serial No. _____, filed on _____ . A certified copy of this foreign application was previously filed in the parent application.

Amend the specification by inserting before the first line the sentence:

--This is a _____ continuation _____ division of co-pending application Serial No. _____, filed on _____.--

The prior application is assigned to _____.

The power of attorney in the prior application is to:

Francis A. Sirr, Reg. No. 17,265, Earl C. Hancock, Reg. No. 19,472, Lee R. Osman, Reg. No. 38,260, James A. Pinto, Reg. No. 40,774, Robert G. Crouch, Reg. No. 34,806, Robert H. Kelly, Reg. No. 33,922, Patrick T. McBride, Reg. No. 39,295, and Brian P. Kinnear, Reg. No. 43,717.

- a. _____ The power appears in the original papers of the prior application.
- b. _____ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
- c. _____ Recognize as associate attorney and address all future communications to:

A verified statement that this filing is by a small entity:

_____ is attached.

_____ has been filed in the parent application and such status has been re-determined and is still proper and desired. (37 C.F.R. 1.28(a)).

Please forward all correspondence to:

Earl C. Hancock, Reg. No. 19,472
HOLLAND & HART LLP
555 Seventeenth Street, Suite 3200
P.O. Box 8749
Denver, Colorado 80201
Phone: (303) 473-2708
Fax: (303) 473-2720

Dated this 3RD day of DEC., 1999.

Respectfully submitted,



Earl C. Hancock, Reg. No. 19,472
Attorney for Applicant(s)
HOLLAND & HART LLP
555-17th St., Suite 3200
P.O. Box 8749
Denver, Colorado 80201
(303) 473-2708

PATENT
EXPRESS MAIL NO. EL415726719US
Attorney Docket No. 40725.830063.000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
JORMA ANTERO SEPPANEN) Group Art Unit: _____
Serial No. _____) Examiner: _____
Filed: Herewith)
For: SIGNAL QUALITY)
INDICATOR APPARATUS AND)
METHOD PARTICULARLY)
USEFUL FOR MOBILE)
TELEPHONES)

jc511 U.S. PRO
09/454124
12/03/99

CERTIFICATE OF MAILING BY EXPRESS MAIL

Box PATENT APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

Sir:

The undersigned hereby certifies that the following documents:

1. Transmittal Letter for Patent Application
2. Utility Patent Application
3. Combined Declaration and Power of Attorney
4. 4 sheets of drawings (copies)
5. \$760.00 filing fee
6. Return postcard
7. Certificate of Mailing By Express Mail

relating to the above application, were deposited as "Express Mail", Mailing Label No. EL415726719US with the United States Postal Service, addressed to Box PATENT APPLICATION, the Assistant Commissioner for Patents, Washington, D.C., 20231, December 3, 1999

December 3, 1999
Date

Earl C. Hancock
Mailier

3 DECEMBER 1999
Date

Earl C. Hancock
Earl C. Hancock
Reg. No. 19,472
Attorney for Applicant
HOLLAND & HART LLP
555-17th Street, Suite 3200
Post Office Box 8749
Denver, Colorado 80201
(303) 473-2708

BACKGROUND OF THE INVENTION

5 The present invention relates to apparatus and methods for indicating the quality of received signals. The present invention is particularly useful in conjunction with mobile telephones or cell-phones.

A conventional mobile phone typically displays the channel signal strength information, such as by presenting a vertical bar or horizontal bar. The amount so displayed is based upon the current channel Received Signal Strength (RSSI). There is a problem with such displays in that the RSSI does not reflect anything about the channel quality for the user.

Even when the RSSI is indicated as very good, the user can experience
15 degenerated call quality because of interference, etc., despite an acceptable
quantity of RSSI. Further, with no indication that the signal quality has
deteriorated or is unacceptable, the user might erroneously conclude that there
is a problem with the phone unit instead of a loss of acceptable received signal
quality.

The quality of a received signal is detected. The results of this detection are presented to the user as by any one or more of a variety of indicators. For example, blinking signal strength displays could indicate the channel quality. An audible alert could be employed as could text on the display, a vibrating indicator, an icon, indicator lights including variable intensity and/or variable color displays, and the like.

Also audio signal quality could be used for the same purpose; namely, an indication of the extent of distortion of the signal.

The method of this invention indicates the quality of a received signal at a mobile phone which a signal is received from a remote transmitter. This
5 received signal is inspected to determine its quality. An output correlated to the results of said inspecting step is then provided in the form of a user discernible indication in response to that output.

This inspecting step can include the step of comparing the received signal with a predetermined threshold. Further, the providing step can include
10 the step of generating a first output whenever the comparing step has met the aforesaid threshold and for otherwise generating a second output different from that first output.

The present invention is useful in conjunction with a digital transmission and receiving system wherein the inspecting step can include the step of
15 determining the BER of the received signal over a predetermined sampling period. It is also possible to ensure that the received signal has failed to meet the threshold value for a predetermined time-out period before generating the output indicative of such a failure.

It is particularly useful for the providing step to include the step of
20 establishing a visual indicator for the user discernible indication although a variety of user-sensible indicators are possible.

Apparatus in accordance with this invention provides an indication of the quality of a received signal at a mobile phone. A signal receiving antenna on the mobile phone receives signals transmitted from a remote location. A
25 signal quality determining arrangement in the mobile phone is coupled for inspecting this received signal, and provides an output signal indicative thereof. A user-discernible indication generator is then operable in response to this output signal.

This signal quality determining arrangement can include a comparator device coupled for comparing the received signal with a predetermined threshold. The comparator generates a first output whenever the received signal has met the threshold level while otherwise generating a second output
5 different from the first output. The apparatus is useful in conjunction with a digital transmission and receiving system. In this case, it typically can include a BER measuring device operable over a selected sampling period.

The apparatus can further include a time-out circuit coupled between the signal quality measuring arrangement and the user discernible signal
10 generator for ensuring that the received signal has maintained its measured level relative to this threshold value for a predetermined period before generating the user discernible output.

The foregoing and other features, utilities and advantages of the invention will be apparent from the following more particular description of a preferred embodiment of the invention as illustrated in the accompanying
15 drawings.

BRIEF DESCRIPTION OF THE DRAWING

FIGURE 1 is a block diagram of the operation of one embodiment of the present invention.

20 FIGURE 2 is a view of a typical mobile phone display suitable for use in conjunction with the present invention.

FIGURE 3 is a block diagram of the elements associated with a mobile telephone incorporating the present invention.

25 FIGURE 4 is a flowchart illustrating one embodiment of the present invention.

FIGURE 5 is a flowchart of the quality decision elements of FIG. 4.

FIGURE 6 is a block diagram of a signal quality indication system based upon an audio quality measurement.

FIGURE 7 is a more detailed diagram of the audio quality measurement element of FIG. 6.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 illustrates the primary function of the present invention wherein
5 a received communication signal 10 is inspected and a signal quality decision
12 is reached relative to that signal. In the presence of a transmitted signal 10
which is of an acceptable quality, a normal signal indicator 14 is actuated.
Conversely, if the received signal 10 is below a minimum quality threshold, an
inferior signal indicator 15 is enabled or actuated.

10 For example, the present invention can operate in conjunction with a
display 20 contained on a mobile phone or cell-phone. In this display, a series
of bars 21, 22 and 23 along the left side reflect various signal strength
indications. Whenever the signal quality decision 12 in an active digital mode
determines that the Bit Error Rate (BER) is at or near 0.0%, indicators bars
15 21-23 on the left side are shown constant without blinking. If the signal
quality deteriorates such that the BER drops below a minimum value such as a
BER greater than 4%, left indicators 21-23 are caused to start blinking. The
initiation of the blinking can occur after a preselected time-out such as 0.5
seconds, for example.

20 When the display begins blinking, or otherwise indicating that the
received signal quality has deteriorated, the user can take steps to improve the
received signal quality. For instance, the user can change the position of the
mobile phone while monitoring the display. If the signal quality improves
adequately, the user will observe that the blinking has stopped and the signal
25 bar is shown constantly on the display. Otherwise, the blinking will continue.
Note that the quality indication is possible through other means such as
audible, textual or vibratory arrangements, or any combination thereof.

Note further that the rate of blinking can be adjusted in steps from constant display without blinking for clear or minimally reduced signal quality to a rapid blinking for unacceptable quality. Blinking rates between those two boundary conditions can be proportioned to the magnitude of the signal quality deterioration. It is likewise preferable to employ a time-out before a poor quality indication is presented. This would prevent an erroneous quality deterioration display or signal in response to a transient received signal aberration.

The present invention is also useful in conjunction with an analog mode control channel. All incoming messages include a Cyclic Redundancy Check (CRC) repeated five times. This can include the analog signal. The quality indicator can be determined by the number of correct CRC's are received. For an analog voice channel, the Supervisory Audio Tone (SAT) can be used to monitor channel quality in that it is possible to measure the SAT signal level

For both the digital mode control channel and the digital mode traffic channel, the BER is useful in determining channel quality.

In FIG. 1, normal signal indicator 14 reflects a situation wherein channel quality is good. The poor or inferior signal indicator 15 refers to a situation where the signal quality is weak or unacceptable. For instance, the poor signal criteria may be said to exist whenever BER is greater than 4% for a duration of one second, whereas good quality can be said to exist if the BER remains less than 1% for one second. The exact values for criteria can be determined on a case-by-case basis.

The present invention gives the user an easily deciphered indication of signal quality. In the prior art, while the user receives an indication of signal quantity, the user does not get an indication of received signal quality. Thus, the user of a prior art mobile phone is as likely to conclude that deteriorated speech quality is a function of a malfunction of the phone when the fault lies with the communication network. Thus, the present invention facilitates trouble analysis by the user.

FIG. 3 is a block diagram of a mobile telephone, or cellphone 30, modified to incorporate the present invention. Signal source 32 transmits a radio frequency signal 31 which is detected by receiver 35 of phone 30. That signal is handled by conventional circuitry (not shown) in the phone to produce
5 an audible and/or visible signals for the user.

The signal produced by receiver 35 is monitored by quality detector 38. For a digital system, quality detector 38 could inspect the BER over predetermined sampling periods to produce a signal to display controls 40 thereby actuating the display 42. This conveys a human discernible signal,
10 such as a flashing display, warning light actuation, audible tone, or any suitable output to the user.

An embodiment of the process for operating with both digital and analog systems is shown in the flowchart of FIG. 4. Upon power up 45 of the apparatus, a determination 46 is made as to the phone operating mode. Thus,
15 if an analog voice channel is determined to be present, branch 48A is enabled. The presence of an analog control channel signal enables branch 48B whereas digital voice and control channels are enabled through branches 48C and 48D, respectively.

Each branch proceeds with a quality measurement process 49. Thus, for
20 the analog voice channel, a SAT measurement 50A is made. For analog control, the CRC measurement 50B is performed while the digital BER acceptability for either of the two digital channels is determined in blocks 50C and 50D. In all four cases, a decision 52 is made as to whether the quality of the received signal is good or not good. A normal signal indicator 54 is
25 enabled in the former situation whereas an inferior signal indicator 56 is enabled for the latter.

A time out function in elements 50 are for the purpose of ensuring that the detected condition has persisted long enough to be considered a valid indication. Thus, if the signal has persisted for a long enough period, a "yes"
30 output causes the appropriate display indication 60. Conversely, failure of the

signal to persist throughout the time-out period causes enablement of return 62 to recycle the process. A similar result is produced after enabling the indication at 60 after it is sensed that another sampling cycle should be initiated.

- 5 For an analog system, the SAT might typically be a 5470 Hz, 6000 Hz or 6030 Hz tone transmitted by the base station.

A typical quality decision 50 within block 49 of FIG. 4 is shown in greater detail in FIG. 5. The signal is received at 47 as enabled by detector 48. It is compared against a predetermined level and either a good, or a not-good
10 output is produced. If the quality of the signal is below the predetermined level, a decision 65 is then made as to whether this signal condition has remained below the predetermined minimum level for a specified amount of time. If it has, then the decision is made that a "not good" signal quality
15 minimum, it is presumed that a "good" condition exists, and that output is so indicated. The inverse decision process is provided by 66.

FIG. 6 is a block diagram of a signal quality indication system based upon an audio quality measurement, while FIG. 7 is a more detailed diagram of the audio quality measurement element of FIG. 6. In this embodiment, a phone
20 mode determination is initially provided to indicate either digital or analog control output signal 71 is to be introduced to block 72, or a digital or analog voice signal at 73 is to be introduced to voice channel 74.

In the FIG. 6 system, the voice channel signal quality is measured at block 75 which is shown in greater detail in FIG. 7. As described previously
25 herein, the decision results in either a good output 91, or a bad output 92. The former enables the normal signal quality indicator 76, while the latter enables the inferior signal indicator 77. A time-out function is once again employed to ensure that the signal condition is maintained for more than a transient period of time.

In FIG. 7, the current audio status element 84 determines whether the audio distortion is above or below a predetermined level. If so, output 85A is introduced to element 86 which determines whether this condition has existed for at least a preselected period of time. In this case, a good output 91 is
5 produced.

Conversely, if this distortion has existed above the selected limit for a specified period of time, not good output 92 is raised indicating an unacceptable amount of distortion. Once again, failure of the distortion level to remain above the specified level of the selected period of time raises the
10 presumption that the distortion was merely a transient.

Note that production of an inferior signal indicator, such as at 77 in FIG. 6, can be supplemented with an indicator of the magnitude of inferiority if desired. By way of example, if indicator 77 produces an output that suggests a signal quality is some percentage of acceptable, the indicator output can be
15 arranged to so indicate. As a further example, if an unacceptable quality is reflected by a light that blinks at X cycles per minute, a determination that the quality measurement is half that amount could produce X/2 cycles per minute of blinking. Of course, a solid number display could actually present numbers representative of the amount of quality or distortion actually measured.
20 Furthermore, controlled gray scaling of a display can be employed as a quality level indicator.

While the invention has been particularly shown and described with reference to a preferred embodiment thereof, it will be understood by those skilled in the art that various other changes in the form and details may be
25 made without departing from the spirit and scope of the invention.

What is claimed is:

CLAIMS

1. The method of indicating the quality of a received signal at a mobile phone comprising the steps of:

receiving a signal from a remote transmitter at the mobile phone;

inspecting said received signal for determining its quality;

5 providing an output correlated to the results of said inspecting step; and
providing a user discernible indication in response to said output.

2. The method in accordance with claim 1 in which said inspecting step includes the step of comparing said received signal with a predetermined threshold, and

said providing step includes the step of generating a first output
5 whenever said comparing step has met said threshold and for otherwise
generating a second output different from said first output.

3. The method in accordance with claim 2 for use in conjunction with a digital transmission and receiving system wherein said inspecting step includes the step of determining the BER of said received signal over a sampling period.

4. The method in accordance with claim 3 which includes the step of ensuring that said received signal has failed to meet said threshold value for a predetermined time-out period before generating the said output indicative of such a failure.

5. The method in accordance with claim 1 wherein said providing step includes the step of establishing a visual indicator for said user discernible indication.

6. The method of indicating the quality of a received signal at a mobile phone comprising the steps of:

receiving a signal from a remote transmitter at the mobile phone;

separating control signals from voice signals;

5 inspecting said received voice signal for determining its quality is at least either above or below a predetermined threshold;

providing an output correlated to the results of said inspecting step;
and

providing a user discernible indication in response to said output.

7. The method in accordance with claim 6 wherein said inspecting step includes the step of quantifying the amount by which said audio signal fails to meet said predetermined threshold, and

5 said user discernible indication step includes the step of correlating the amount of said user discernible indication to the result of said quantifying step.

8. The method in accordance with claim 6 wherein said user discernible providing step includes the step of causing a visible display to pulsate.

9. The method of claim 8 wherein the amount of said display pulsation is correlated to the amount said received voice signal departs from said predetermined threshold level.

10. The method in accordance with claim 6 wherein said user discernible providing step includes the step of causing a user discernible audio signal indicating the voice signal quality.

11. The method in accordance with claim 10 which includes the step of correlating the magnitude of said audio signal to the amount of departure of said audio signal from said predetermined threshold.

12. The method in accordance with claim 6 which includes the step of ensuring that the results of said inspecting step have remained over a preselected time-out period before generating the said user discernible indication.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
221

13. Apparatus for indicating the quality of a received signal at a mobile phone comprising:

a signal receiving antenna on the mobile phone for receiving signals transmitted from a remote location;

5 a signal quality determining arrangement in said mobile phone coupled for inspecting said received signal and providing an output signal indicative thereof; and

a user discernible indication generator operable in response to said output signal.

14. Apparatus in accordance with claim 13 in which said signal quality determining arrangement includes a comparator coupled for comparing said received signal with a predetermined threshold, said comparator generating a first output whenever said received signal has met said threshold
5 and for otherwise generating a second output different from said first output.

15. The apparatus in accordance with claim 14 for use in conjunction with a digital transmission and receiving system which includes a BER measuring device operable a selected sampling period.

16. The apparatus in accordance with claim 13 which includes a time-out circuit coupled between said signal quality measuring arrangement and said generator for ensuring that said received signal has maintained its measured level relative to said threshold value for a predetermined period
5 before generating the said user discernible output.

SIGNAL QUALITY INDICATOR APPARATUS AND METHOD
PARTICULARLY USEFUL FOR MOBILE TELEPHONES

ABSTRACT OF THE DISCLOSURE

5 The quality of radio frequency signals received at a mobile phone or
cellphone is sampled. The results are employed to produce a human
discernible indication such as by blinking a received signal strength bar on a
display. The bar remains constant without blinking if the signal quality is at or
below a preselected minimum and can have the blinking rate increase as the
10 sensed signal quality decreases. Distortion can be determined in either the
digital or analog mode. Digital signal quality can be reflected in the sensed bit
error rate while the level of analog signal quality can be determined from the
supervisory audio tone. .

15 BOULDER:0129909.01

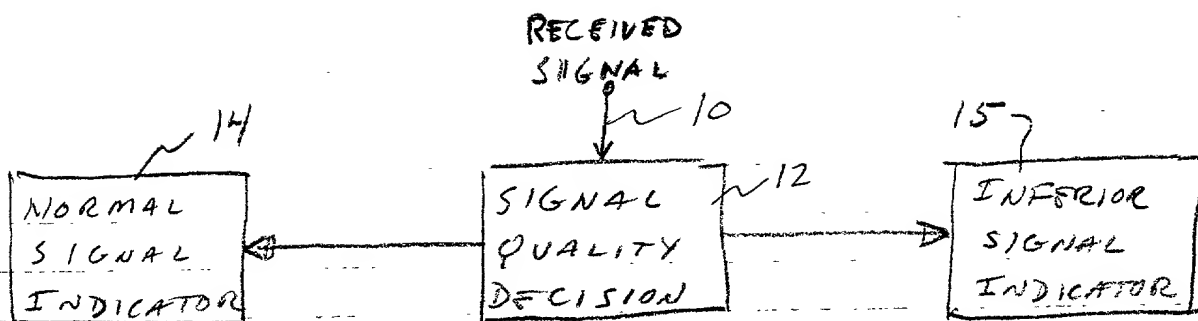


FIG. 1

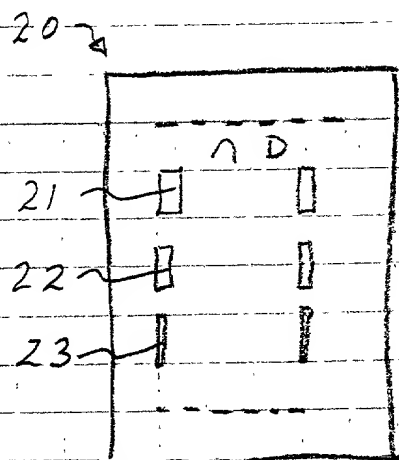


FIG. 2

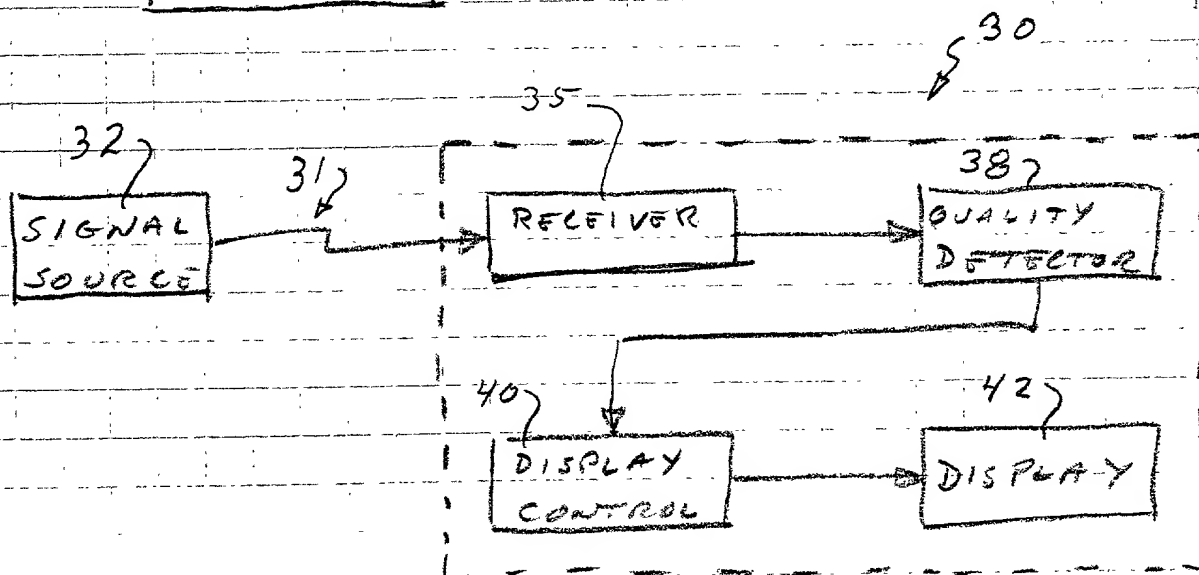


FIG. 3

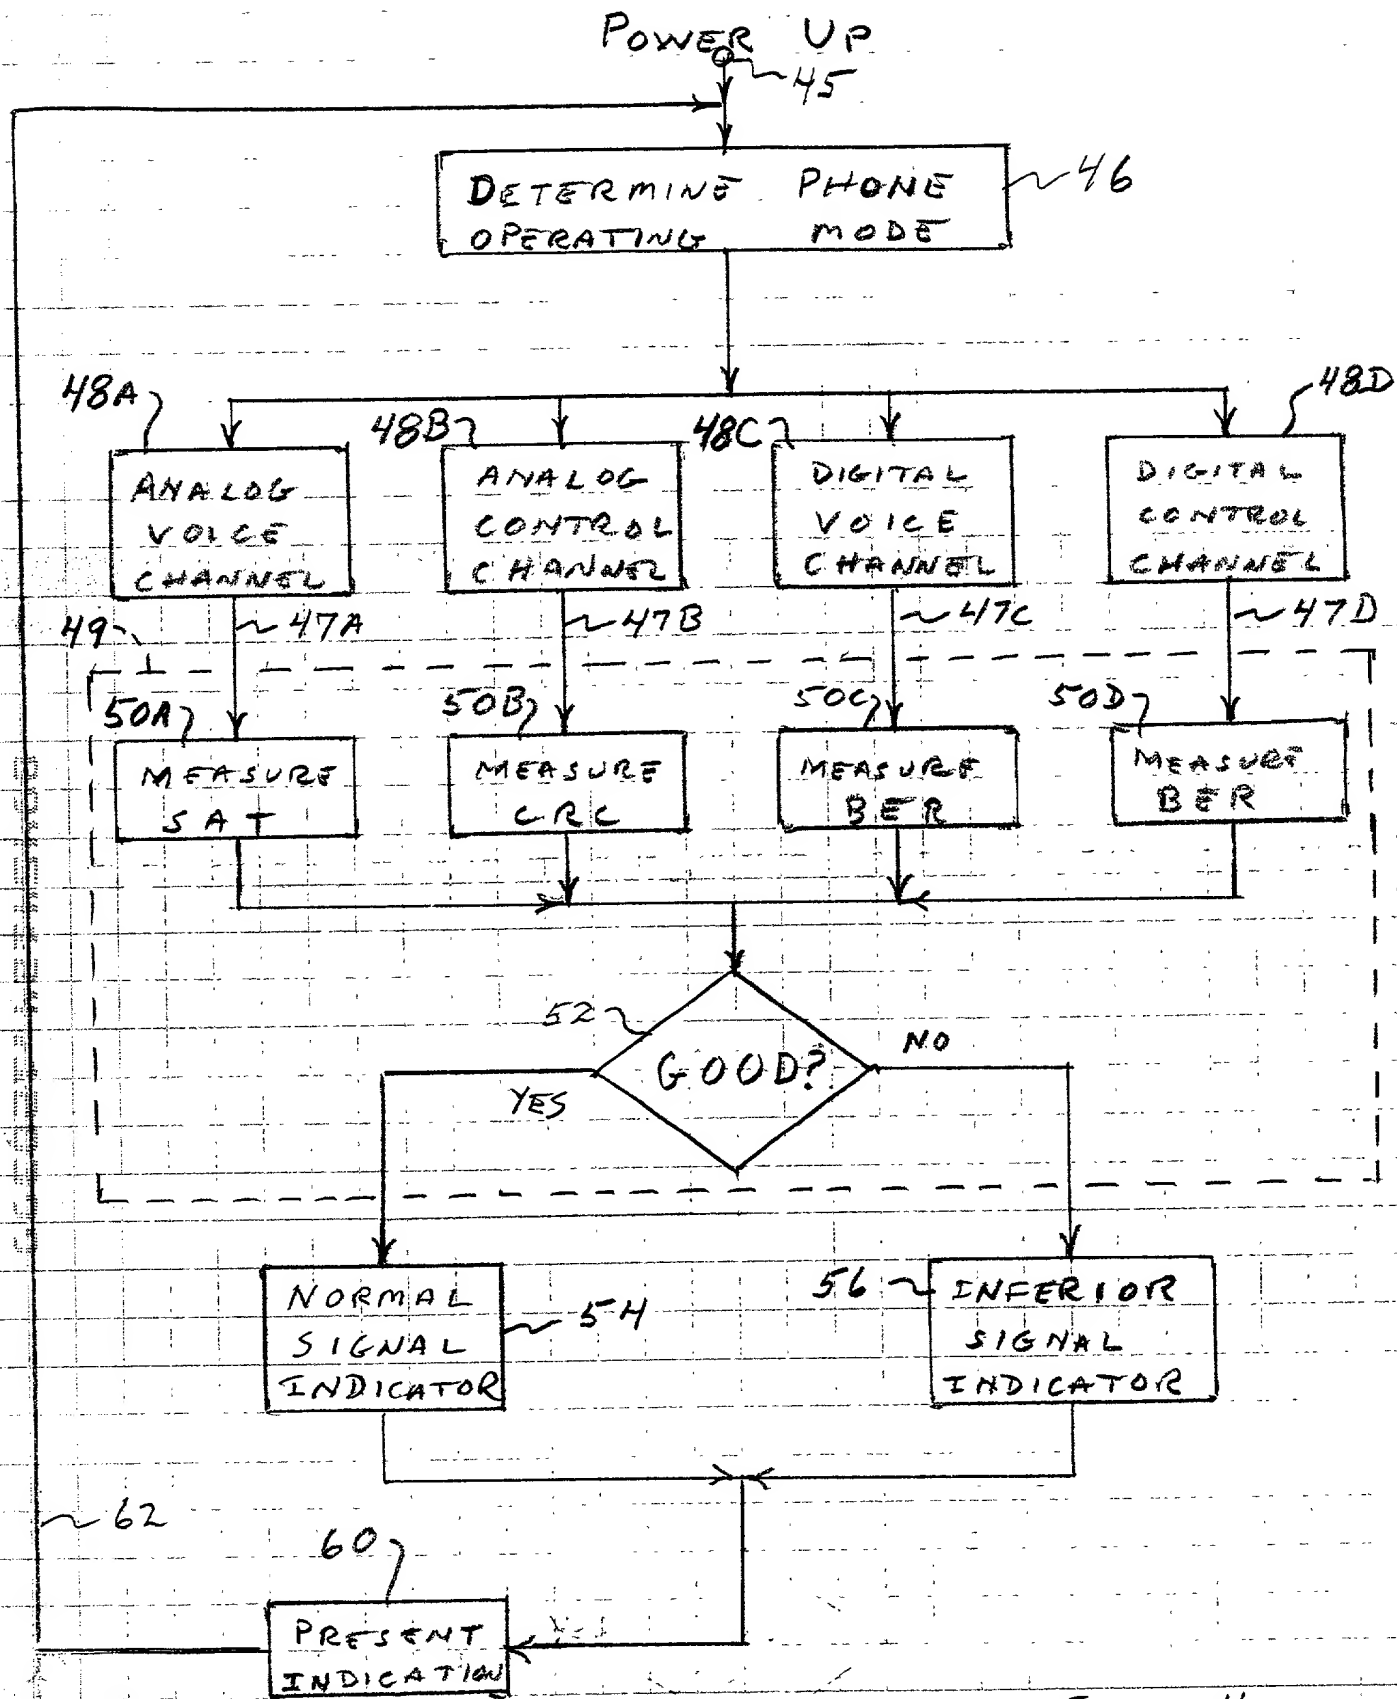


FIG. 4



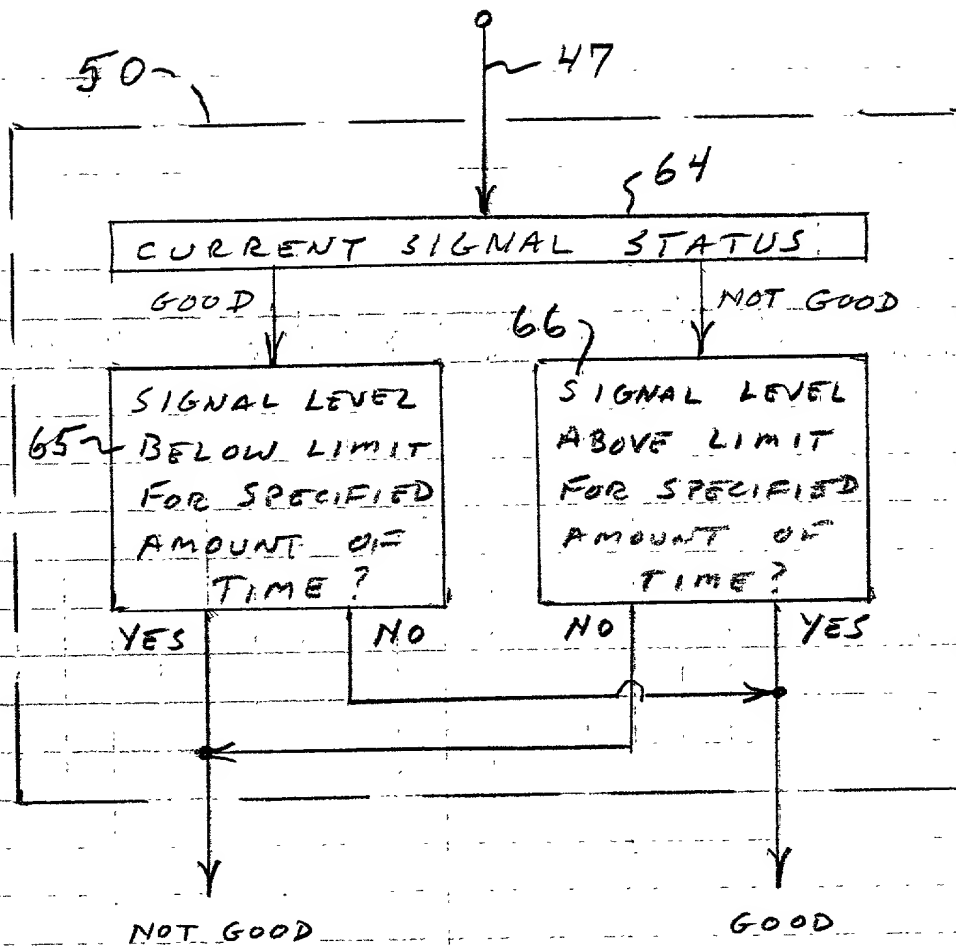


FIG. 5

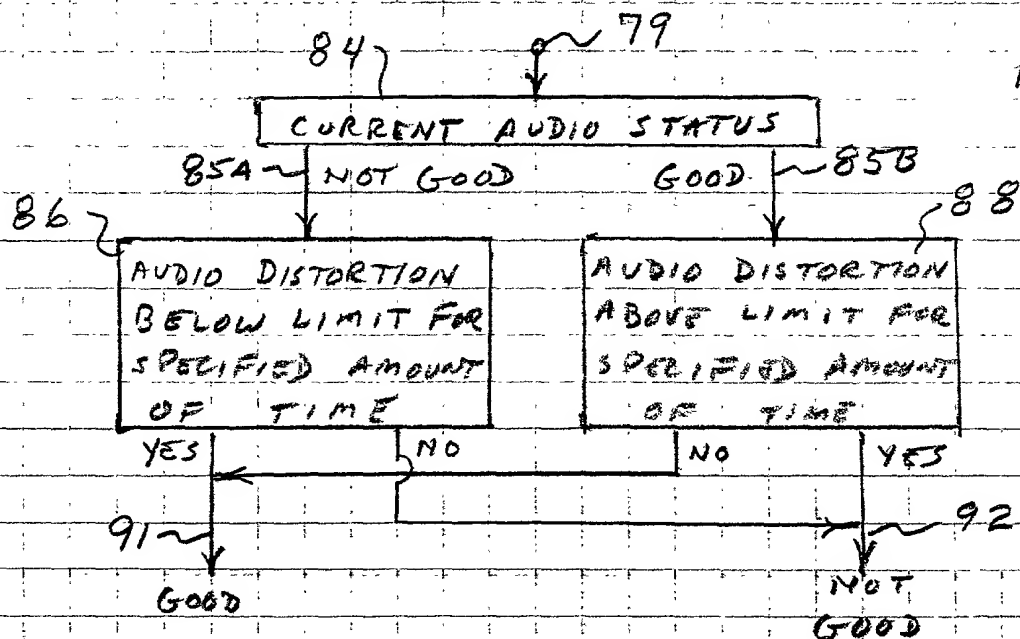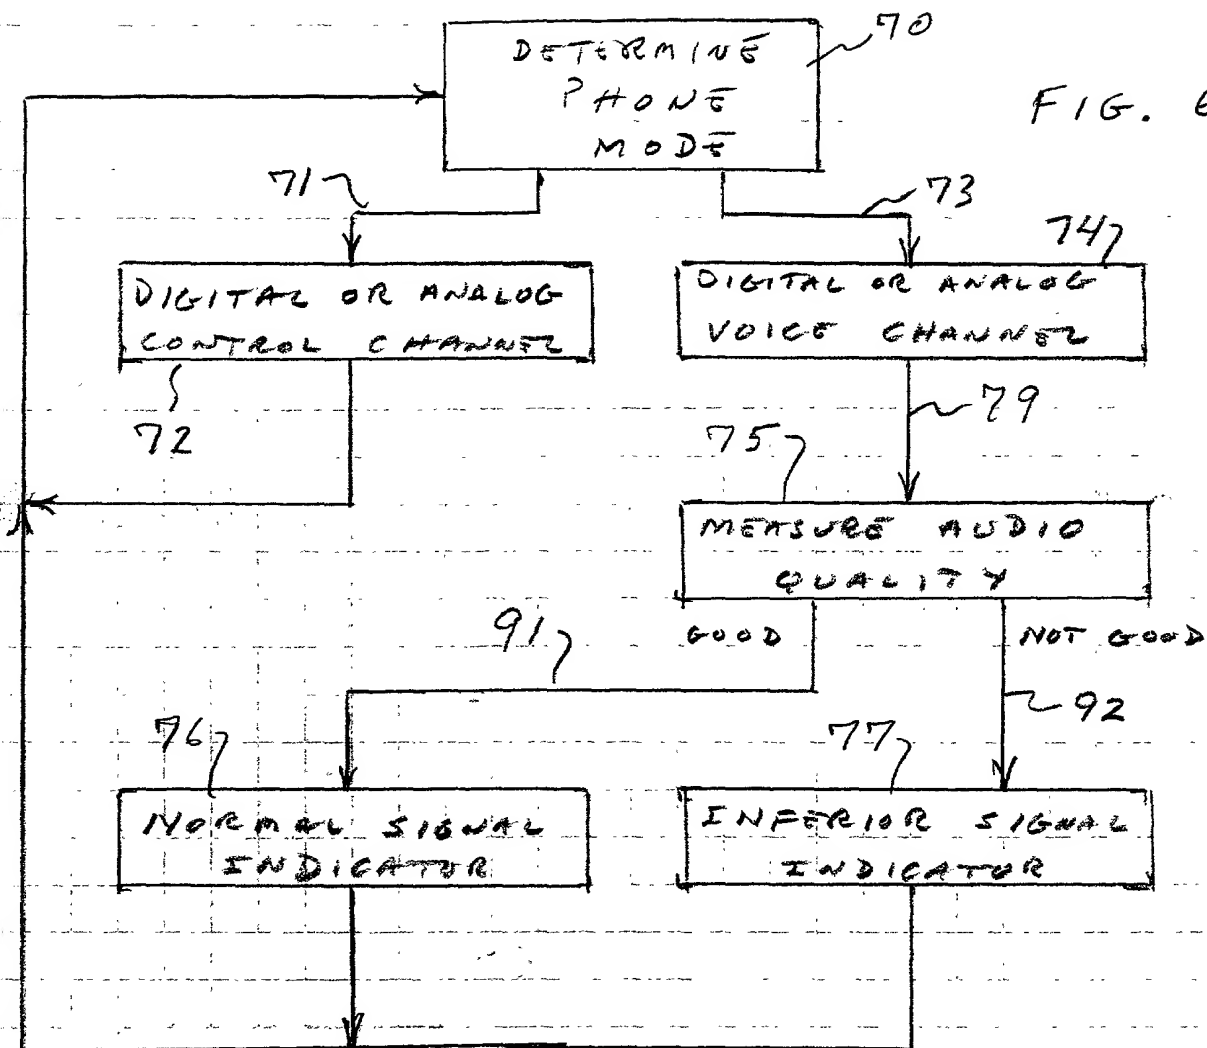

COMBINED DECLARATION AND POWER
OF ATTORNEY FOR PATENT APPLICATION

DECLARATION:

As below named inventor, I hereby declare that:

My residence, post office addresses and citizenship are as stated below next to my name.

I believe I am the original, first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled SIGNAL QUALITY INDICATOR APPARATUS AND METHOD PARTICULARLY USEFUL FOR MOBILE TELEPHONES, the specification of which is filed concurrently herewith.

The person named as inventor in this application is JORMA ANTERO SEPPANEN.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

No prior foreign application for patent or inventor's certificate has been filed.

No priority claim is made under 35 U.S.C. § 119 or 35 U.S.C. § 120.

POWER OF ATTORNEY:

As named inventor, I hereby appoint Francis A. Sirr, Reg. No. 17,265, Earl C. Hancock, Reg. No. 19,472, Lee R. Osman, Reg. No. 38,260, James A. Pinto, Reg. No. 40,774, Robert G. Crouch, Reg. No. 34,806, Robert H. Kelly, Reg. No. 33,922, Patrick McBride, Reg. No. 39,295, and Brian P. Kinnear, Reg. No. 43,717 to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Send all correspondence to: Earl C. Hancock, HOLLAND & HART^{LLP}, 555 17th Street, Suite 3200, P.O. Box 8749, Denver, Colorado 80201, and direct telephone calls to Earl C. Hancock, telephone number 303-473-2708.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name:	JORMA ANTERO SEPPANEN
Inventor's Signature:	
Date:	
Residence: (City, State and/or country)	1130 Hidden Ridge #2172 Irving, Texas 75038
Citizenship:	Finland
Post Address Office:	Same As Residence